



**NEWAY AIR SUSPENSION  
Vehicle Suspension Information**

**Form #3130048 Side 1 of 2**

The following information and measurements are required in order to determine if the vehicle can be fit with Onspots, and, if so, which model Onspot chain set and mounting bracket kit is required. This information will be different from vehicle to vehicle based on make/model, axle make/model, tire size and wheel offset. Any questions in completing this form can be addressed to Onspot at **800-224-2467**.

Date: \_\_\_\_\_ Measured by: \_\_\_\_\_

Dealer or OEM name: \_\_\_\_\_

Customer name: \_\_\_\_\_ Unit No. \_\_\_\_\_

Address: \_\_\_\_\_

City: \_\_\_\_\_ State: \_\_\_\_\_ Zip: \_\_\_\_\_

Contact: \_\_\_\_\_ Phone: \_\_\_\_\_

Quantity of identical vehicles for this order: \_\_\_\_\_

Description: (School Bus, Fire Truck, etc.): \_\_\_\_\_

Vehicle Make: \_\_\_\_\_ Model: \_\_\_\_\_ Year: \_\_\_\_\_

***Note: The following information applies to the rear suspension only.***

Suspension Model: \_\_\_\_\_

Axle Make: \_\_\_\_\_ Capacity: \_\_\_\_\_ Tandem/Single

Axle Speed: Single/Two Tire size: \_\_\_\_\_ Brand: \_\_\_\_\_

**PLEASE FAX COMPLETED FORM TO 812-346-1819**




Automatic Tire Chains

**NEWAY AIR SUSPENSION FORM #3130048**

**Side 2 of 2**

- (GB) Ground to the bottom of the suspension beam approx 11" in front of the axle.
- (H) The height of the suspension beam top to bottom.
- (W) The width of the suspension beam side to side.
- (C) The distance from the outside of the beam to the tire sidewall.
- (BID) The distance across the inside of the suspension beams.

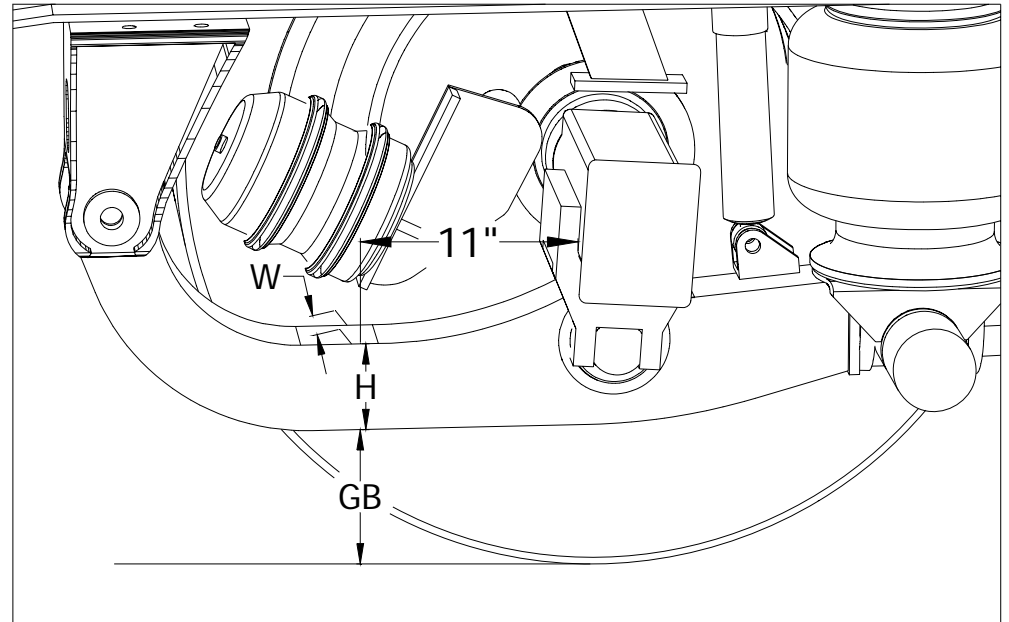

Questions?? 1-800-224-2467

FAX COMPLETED FORM TO: 812-346-1819

Ground to Beam GB = \_\_\_\_\_

Height of Beam H = \_\_\_\_\_

Width of Beam W = \_\_\_\_\_

Sidewall to Beam C = \_\_\_\_\_

Distance inside of beams BID = \_\_\_\_\_

